


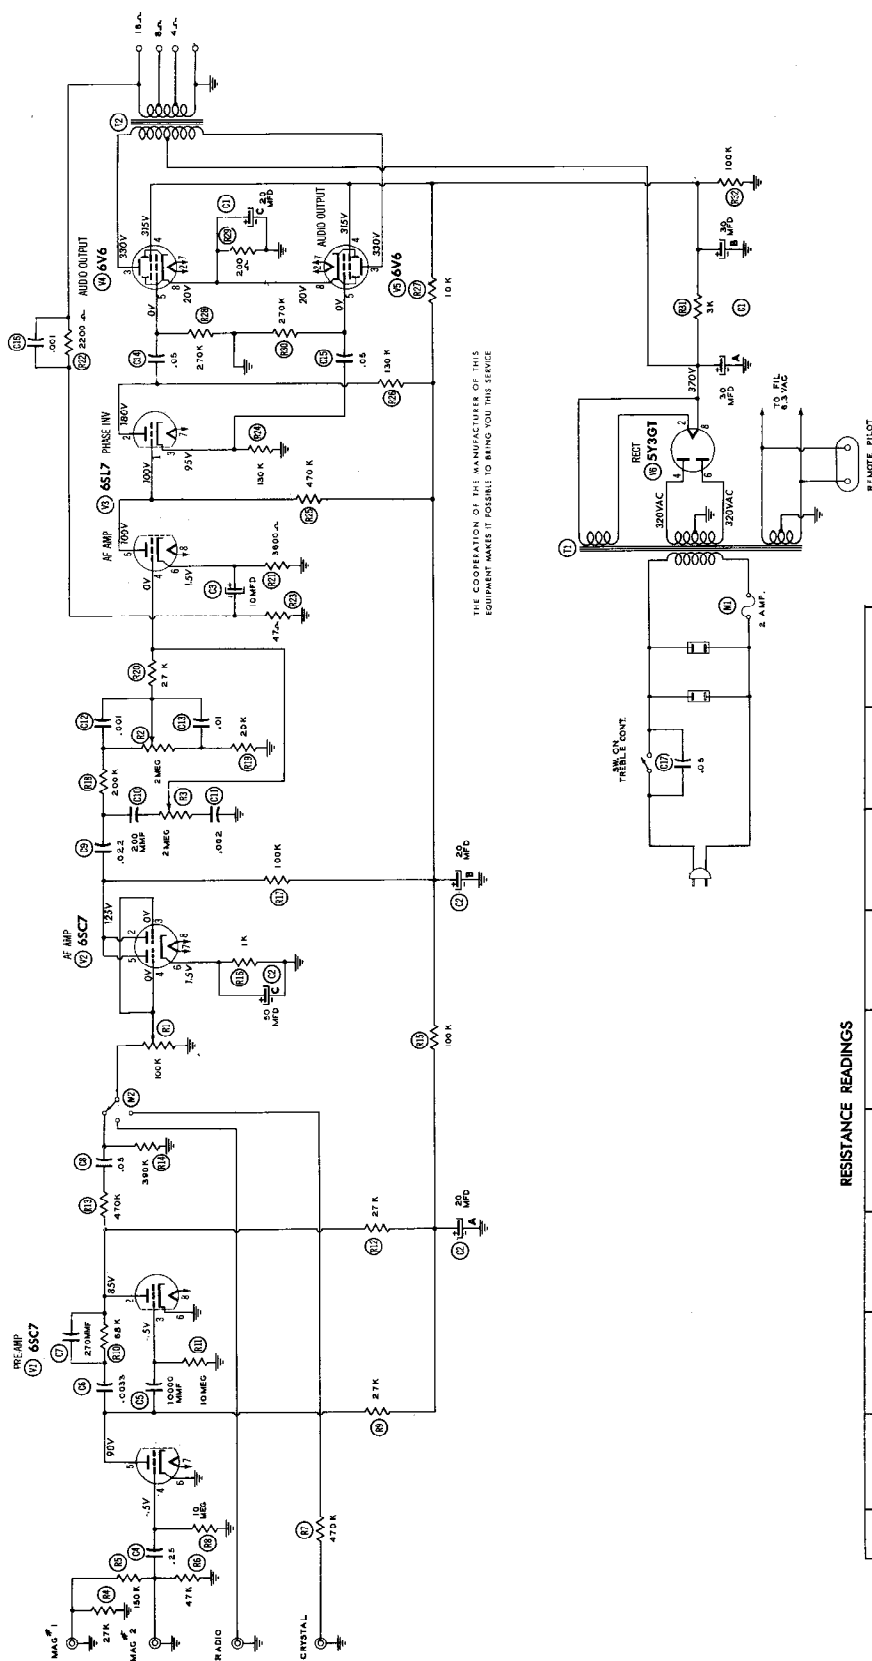

RESISTANCE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
V 1	6SC7	0Ω	† 160KΩ	10Meg	10Meg	† 160KΩ	0Ω	.1Ω	.1Ω
V 2	6SC7	0Ω	† 130KΩ	0Ω	0Ω	† 130KΩ	1KΩ	.1Ω	.1Ω
V 3	6SL7	† 470KΩ	† 150KΩ	150KΩ	50KΩ	† 470KΩ	3.6KΩ	.1Ω	.1Ω
V 4	6V6GT	0Ω	.1Ω	† 200Ω	† 2.7KΩ	270KΩ	INF	.1Ω	200Ω
V 5	6V6GT	0Ω	.1Ω	† 200Ω	† 2.7KΩ	270KΩ	.1Ω	.1Ω	200Ω
V 6	5Y3GT	INF	100KΩ	INF	100Ω	INF	110Ω	INF	100KΩ

© Howard W. Sams & Co., Inc. 1953

1. DC Voltage measurements are at 20, 000 ohms per volt; AC Voltage measurements are at 1000 ohms per volt.
2. Socket connections are shown as bottom views.
3. Measured values are from socket pin to common negative.
4. Line voltage maintained at 117 Volts for voltage readings.
5. Nominal tolerance on component values makes possible a variation of $\pm 15\%$ in voltage and resistance readings.
6. All controls at minimum, proper output load connected.